

DEWALT®

WE ARE
**CHANGING
THE GAME**

**XR FLEX
VOLT**

NORDIC RANGE BROCHURE

www.DEWALT.com

GUARANTEED TOUGH.®

DEWALT**XR FLEX
VOLT****POWER OF CORDED | FREEDOM OF CORDLESS**

WHAT IS XR FLEXVOLT?

XR FLEXVOLT is a range of 54V power tools that offer performance and runtime which has never been seen before. For the first time professional tradesmen can reliably undertake heavy-duty construction applications without the need for mains power.

This innovation means that you can have true mains performance across a range of tools without the inconvenience of a cord. **DEWALT XR FLEXVOLT** is the only battery on the market that can switch from 54V to 18V making it backward compatible with your existing XR powertools.



18V 54V

CORDLESS WITHOUT COMPROMISE

Traditionally, when compared with corded power tools even the most efficient cordless systems required a compromise between portability and power.

DEWALT has unlocked the true potential of cordless technology to deliver a growing range of 54V power tools that require zero compromise. All the power of corded, with the freedom of cordless.

CONVERTIBLE BATTERY PACK

18V XR

Backwards compatible

54V XR FLEX VOLT

XR FLEXVOLT




DEWALT is committed to offering real-world practicality and convenience.

The XR FLEXVOLT battery pack is not only interchangeable across the complete 54V range but is also backwards compatible with all existing 18V XR tools. Circular saws, Drills, Table Saws, Nail Guns, Alligator Saws, Impact Drivers – professional tradesmen can now operate every power tool they need on a single cordless system.

18V XR



54V XR FLEX VOLT



XR FLEX VOLT



ADVANCED TECHNOLOGY

Standard XR batteries have 5 x 3.6V (18V) cells connecting in a series and either one or two strings in parallel, giving either an 18V 2.0 Ah or an 18V 5AH battery.

FLEXVOLT batteries are flexible. They connect in parallel for 18V tools and in a series for 54V tools. The result? The right power for the tool - with increased runtime and consistent performance.

XR FLEX VOLT

POWER OF CORDED | FREEDOM OF CORDLESS™

54V





DEWALT MOVIE

54V XR FLEXVOLT

54V XR FLEXVOLT TABLESAW DCS7485

54V XR cordless table saw featuring a 610 mm ripping capacity with class leading rack and pinion fence adjustment. Lightweight, compact and easy to transport without compromising performance. Intuitive tool free adjustments and onboard accessory storage.

SPECIFICATIONS

Blade Diameter	210 mm
Max. Depth of Cut	65 mm
Ripping Capacity 90°/90°	610 mm
Bevel Capacity	48°
Weight	21.5 kg

RECOMMENDED BENCHES: DE7450, DE7400, DWE74911

ART. NO. PRODUCT DESCRIPTION

DCS7485N-XJ	54V XR FLEXVOLT table saw 210 mm bare
DCS7485T2-QW	54V XR FLEXVOLT table saw 210 mm 2 x 6.0 Ah

RECOMMENDED ACCESSORIES:

DT20432-QZ	210 mm, 24 T, 30 mm arbor diameter
DT20433-QZ	210 mm, 40 T, 30 mm arbor diameter
DWV9470-XJ	Dustadapter with Y-split for table saws with airlock



54V XR^{FLEX}VOLT

XPS
CROSS CUT POSITIONING SYSTEM

2 X 54V XR FLEXVOLT 305 MM MITRE SAW DHS780

The only 305 mm mitre saw with the perfect combination of mains power and capacity with cordless freedom. 2 x 54V XR FLEXVOLT batteries or AC power adaptors make the most of your performance anytime, anywhere. XPS cutline technology delivers supreme cut accuracy and illumination of the workpiece without the set up and problems of laser systems.



AC power adaptor

SPECIFICATIONS

Blade diameter	305 mm
Bore size	30 mm
Cutting Capacity 90°/90°	303 x 110 mm
Mitre capacity (Left/Right)	60°/50°
Bevel capacity (Left/Right)	49°/49°
Weight	25,5 kg
RECOMMENDED BENCHES:	DE7023 or DE7033

ART. NO. PRODUCT DESCRIPTION

DHS780N-XJ	2 X 54V XR FLEXVOLT Mitre saw 305 mm bare
DHS780T2A-QW	2 X 54V XR FLEXVOLT Mitre saw 305 mm 2 x 6.0 Ah
DCB500-QS	230 V power adaptor for DHS780

RECOMMENDED ACCESSORIES:

DT99574-QZ	305 mm, 42 T, 30 mm arbor diameter
DT99575-QZ	305 mm, 60 T, 30 mm arbor diameter
DT99576-QZ	305 mm, 78 T, 30 mm arbor diameter



54V XR FLEXVOLT

**WIRELESS
TOOL CONTROL**

XPS
CROSS CUT POSITIONING SYSTEM

54V XR FLEXVOLT 250 MM MITRE SAW DCS727

The DCS727 offers the ultimate combination of accuracy, power and cordless freedom. Other features include Wireless Tool Control to enable automatic stop start dust extraction when used with the DCV586M, XPS crosscut positioning system for the ultimate in accuracy and visibility with no calibration needed and machined side handles for increased portability on site.

SPECIFICATIONS

Blade diameter	250 mm
Bore size	30 mm
Cutting Capacity 90°/90°	305 x 77 mm
Mitre capacity (Left/Right)	50°/60°
Bevel capacity (Left/Right)	48°/48°
Weight	20,5 kg
RECOMMENDED BENCHES:	DE7023 or DE7033

ART. NO. PRODUCT DESCRIPTION

DCS727N-XJ	54V FLEXVOLT Mitre saw 250 mm bare
DCS727T2-QW	54V FLEXVOLT Mitre saw 250 mm 2 x 6.0 Ah

RECOMMENDED ACCESSORIES:

DT99571-QZ	250 mm, 24 T, 30 mm arbor diameter
DT99572-QZ	250 mm, 36 T, 30 mm arbor diameter
DT99573-QZ	250 mm, 60 T, 30 mm arbor diameter

HOW TO PAIR THE

FLEXVOLT EXTRACTOR WITH A TOOL HAVING WIRELESS TOOL CONTROL FUNCTION.



THE SYSTEM WORKS WITH
THE TOOLS, WHICH HAS
THE WIRELESS TOOL CONTROL
ICON IN THE LEAFLET



**WIRELESS
TOOL CONTROL**

”
**ADVANTAGE WITH
 WIRELESS TOOL
 CONTROL – NO CORDS
 AROUND YOU, WHEN
 USING EXTRACTOR
 AND POWERTOOL.**
 ”

**WIRELESS
 TOOL CONTROL**

AUTOMATIC START OF FLEXVOLT EXTRACTOR, WHEN START WORKING WITH THE TOOL

The perfect solution for second To Pair
 with a DEWALT Wireless Tool Control Tool

1. Press the three position switch (1) to the Wireless Tool Control position (2).
2. Press and hold the Wireless Tool Control pairing button (3) on the DCV586M and pull the trigger on the Wireless Tool Control equipped tool at the same time.
3. The LED (4) will be steadily illuminated to indicate a successful pairing.

NOTE: Only one tool can be paired to the DCV586M at a time. If the unit is already paired the previous tool connection will be overridden.





54V XR FLEXVOLT



54V XR FLEXVOLT 216 MM MITRE SAW DCS777

The perfect solution for second fix work on site, compact and lightweight while offering all the performance and capacity of a mains mitre saw. XPS cutline technology delivers supreme cut accuracy and illumination of the workpiece without the set up and problems of laser systems.

SPECIFICATIONS

Blade Diameter	216 mm
Cutting Capacity 90°/90°	270 x 62 mm
Mitre Capacity	50/50°
Bevel Capacity	48°
Weight	14 kg

RECOMMENDED BENCHES: DE7023 or DE7033

ART. NO. PRODUCT DESCRIPTION

DCS777N-XJ	54V FLEXVOLT Mitre saw 216 mm bare
DCS777T2-QW	54V FLEXVOLT Mitre saw 216 mm 2 X 6,0 AH

RECOMMENDED ACCESSORIES:

DT99568-QZ	216 mm, 24T, 30 mm arbor diameter
DT99569-QZ	216 mm, 36T, 30 mm arbor diameter
DT99568-QZ	216 mm, 60T, 30 mm arbor diameter

”
**PROBABLY ONE OF
 THE STRONGEST
 CORDLESS
 CIRCULAR SAWS
 ON THE MARKET
 - 2600 WATT**
 ”



54V XR^{FLEX}VOLT

54V XR FLEXVOLT 190 MM HIGH TORQUE CIRCULAR SAW DCS577

The DCS577 is the cordless benchmark for high performance circular saws. Perfect for first fix applications the DCS577 offers corded performance with all the benefits of the XR FLEXVOLT cordless platform. The unique diamond shaped blade bore allows more of the power to be transferred into the work piece and tool free adjustments make setting the depth and bevel hassle free.



DT40270-QZ

SPECIFICATIONS

Blade Diameter	190 mm
Bore Size	Diamond
Max. Cutting depth at 90°	65 mm
No Load Speed	5800 rpm
Weight inc. Battery	5.9 kg

ART. NO. PRODUCT DESCRIPTION

DCS577N-XJ	54V XR HI-TORQUE circular saw bare
DCS577T2-QW	54V XR HI-TORQUE circular saw 2 x 6.0 Ah

RECOMMENDED ACCESSORIES:

DT40270-QZ	190 mm, 24 T, diamond shaped arbor
DT40271-QZ	190 mm, 36 T, diamond shaped arbor


54V XR FLEXVOLT

54V XR FLEXVOLT 190 MM CIRCULAR SAW **DCS578**

Upgraded circular saw with 47% more power (2.456 Watt) when using a 9.0 Ah battery compared to the previous model FLEXVOLT 54V - DCS575 (1.672 Watt). The circular saw has a rafter hook and integrated LED light.

With a no-load speed of 5800 rpm, this saw delivers the power of a corded circular saw with the portability and convenience of cordless through revolutionary DEWALT XR FLEXVOLT technology.

SPECIFICATIONS

Blade diameter	190 mm
Bore size	30 mm
Max. cutting depth at 90°	67 mm
Max. cutting depth at 45°	49 mm
Weight	3.6 kg

ART. NO.

PRODUCT DESCRIPTION

DCS578N-XJ	54V XR 190 mm circular saw bare
DCS578NT-XJ	54V XR 190 mm circular saw TSTAK bare
DCS578T2-QW	54V XR 190 mm circular saw TSTAK 2 x 6.0 Ah
DCS578X2-QW	54V XR 190 mm circular saw TSTAK 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT99562-QZ	190 mm, 24 T, 30 mm arbor diameter
DT99563-QZ	190 mm, 36 T, 30 mm arbor diameter
DT99564-QZ	190 mm, 60 T, 30 mm arbor diameter



54V XR^{FLEX}VOLT

54V XR FLEXVOLT 190 MM RAIL COMPATIBLE CIRCULAR SAW DCS579

Upgraded circular saw (track compatible) with 47% more power (2.456 Watt) when using a 9 Ah battery compared to the previous model FLEXVOLT 54V - DCS576 (1.672 Watt). The circular saw has a rafter hook integrated LED light and electronic brake to protect the user from kick back.

With a no-load speed of 5800 rpm, this saw delivers the power of a corded circular saw with the portability and convenience of cordless. The base of the saw is compatible with all DEWALT plunge saw rails for increased accuracy.

SPECIFICATIONS

Blade diameter	190 mm
Bore size	30 mm
Max. cutting depth at 90° (with track)	61 mm (58 mm)
Max. cutting depth at 45° (with track)	43 mm (39 mm)
Weight	3.7 kg

ART. NO.

PRODUCT DESCRIPTION

DCS579NT-XJ	54V XR 190 mm circular saw track compatible TSTAK bare
DCS579T2-QW	54V XR 190 mm circular saw track compatible TSTAK 2 x 6.0 Ah
DCS579X2-QW	54V XR 190 mm circular saw track compatible TSTAK 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT99562-QZ	190 mm, 24 T, 30 mm arbor diameter
DT99563-QZ	190 mm, 36 T, 30 mm arbor diameter
DT99564-QZ	190 mm, 60 T, 30 mm arbor diameter


54V XR FLEXVOLT
**WIRELESS
TOOL CONTROL**

54V XR FLEXVOLT 165 MM PLUNGE SAW DCS520

The ultimate cordless plunge saw that delivers mains accuracy and performance with 54V XR FLEXVOLT cordless convenience and runtime. Fully compatible with the DEWALT dual sided rail system which benefits from extended lifetime of the rubber and 2 saws can be calibrated to one rail. The blade housing and Airlock dust extraction port offers class leading dust extraction on site.

SPECIFICATIONS

Blade Diameter	165 mm
Bore Size	20 mm
Max. cutting depth at 90°	55 mm
Max. depth of Cut 45°	40 mm
Bevel Capacity	47°
Weight	4.7 kg

ART. NO.

PRODUCT DESCRIPTION

DCS520NT-XJ	54V FLEXVOLT plunge saw TSTAK bare
DCS520T2-QW	54V FLEXVOLT plunge saw TSTAK 2 X 6.0 Ah
DCS520T2R-QW	54V FLEXVOLT plunge saw, 1,5 mt rail, TSTAK 2 x 6.0 Ah

RECOMMENDED ACCESSORIES:

DDT99561-QZ	165 mm, 42T, 20 mm arbor diameter
DWS5022-XJ	1.5 M guide rail
DWS5023-XJ	2.6 M guide rail



WE SEE THE **BIGGER PICTURE**

**EVERY USER
EVERY JOB
EVERY SITE
DESIGNED TO WORK TOGETHER**

**XR FLEX
VOLT**

POWER OF CORDED | FREEDOM OF CORDLESS



54V XR RECIPROCATING SAW DCS389

Upgraded reciprocating saw with 19% more power (1.874 Watt) when using a 9.0 Ah battery compared to the previous model FLEXVOLT 54V - DCS388 (1.574 Watt) The reciprocating saw has an integrated LED light.

With a no-load speed of 3000 spm, this saw delivers the power of a corded reciprocating saw with the portability and convenience of a cordless through our revolutionary DEWALT XR FLEXVOLT technology.

SPECIFICATIONS

Brushless motor	Yes
Stroke speed unloaded	0-3000 strokes/min.
Stroke length	29 mm
Hand/Arm vibration – sheet wood	13 m/s ²
Hand/Arm vibration – timber	10 m/s ²
Weight	3.5 kg

ART. NO.

PRODUCT DESCRIPTION

DCS389N-XJ	54V XR reciprocating saw solo
DCS389NT-XJ	54V XR reciprocating saw TSTAK solo
DCS389T2-QW	54V XR reciprocating saw TSTAK 2 x 6.0 Ah
DCS389X2-QW	54V XR reciprocating saw TSTAK 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT99553-QZ	152 mm, for Metal, 5 pcs in pack.
DT99554-QZ	152 mm, for Wood & Nails, 5 pcs in pack
DT99552-QZ	203 mm, for Metal, 5 pcs in pack.
DT99555-QZ	230 mm, for Wood & Nails, 5 pcs in pack



54V XR FLEXVOLT

54V XR FLEXVOLT ALLIGATOR SAW DCS397

The 54V XR FLEXVOLT alligator saw are delivering corded performance from a cordless tool. This powerful alligator saw is ideal for cutting through hollow clay blocks, aerated concrete, timber and insulation materials. The DCS397 alligator saw features two durable blades with a thicker sword for reduced deflection and a more accurate cut. The integrated blade clamp enables the entire sword to pass through the substrate with ease.

SPECIFICATIONS

Blade Length	430 mm
Stroke Rate	0 - 2400 spm
Stroke Length	40 mm
Weight	5.6 kg

ART. NO.

PRODUCT DESCRIPTION

DCS397N-XJ	54V XR FLEXVOLT Alligator saw 430 mm bare
DCS397T2-QW	54V XR FLEXVOLT Alligator saw 430 mm 2 x 6.0 Ah

RECOMMENDED ACCESSORIES:

DT99591-QZ	430 mm, for poroton
DT99593-QZ	430 mm, for wood



54V XR FLEXVOLT

PERFORM PROTECT

54V XR FLEXVOLT RIGHT ANGLE DRILL DCD470

Our most powerful cordless drill ever! Perfect for end users who need to drill large diameter holes in timber or masonry. This right angle drill provides exceptional power, control, cordless convenience and runtime with our 54V brushless motor. The E-Clutch uses gyroscopic technology to protect the user from injury in bind-up situations – Perform & Protect certified.

SPECIFICATIONS

Max. Torque	269 Nm
Max Drilling Capacity Wood	158 mm
Max. Drilling Capacity Masonry	152 mm
No Load Speed	1320 rpm
Weight	5.5 kg

ART. NO. PRODUCT DESCRIPTION

DCD470N-XJ	54V XR FLEXVOLT right-angle drill, 269 Nm, bare
------------	---

RECOMMENDED ACCESSORIES:

DT4588-QZ	76 mm self-feed/forstner drill bit.
DT4589-QZ	92 mm self-feed/forstner drill bit.
DT4590-QZ	117 mm self-feed/forstner drill bit.



TSTAK™

DEWALT MOVIE

54V XR FLEXVOLT™

DEWALT

BRUSHLESS
54V

**AIR
LOCK**

M    **M**

**WIRELESS
TOOL CONTROL**

**PERFORM
PROTECT**

54V XR FLEXVOLT M-CLASS EXTRACTOR DCV586M

Powered by 54V XR FLEXVOLT technology the DCV586M is the ultimate dust extraction solution for a new generation of cordless tools and the key to unlocking the cordless jobsite. The DEWALT brushless motor and high capacity XR FLEXVOLT battery coupled with dual M-Class certified filters with automatic cleaning delivers powerful, constant performance and runtime for the most demanding applications. Other features include a remote for wireless operation, a recessed battery housing to protect from jobsite conditions and TSTAK compatibility.

SPECIFICATIONS

Filter Clean	Automatic
Wet / Dry	Yes
Tool Actuation	Wireless Keyfob
Capacity	11 L
Hose Length	2.5 m
Weight	7.5 kg

ART. NO.

PRODUCT DESCRIPTION

DCV586MN-XJ	54V XR FLEXVOLT dust extractor, M-Class, Tstak, bare
DCV586MT2-QW	54V XR FLEXVOLT dust extractor, M-Class, Tstak, 2 x 6.0 Ah

RECOMMENDED ACCESSORIES:

DCV5861-XJ	Replacement filter for DCV586
DCV9401-XJ	Replacement paper bags for DCV586
DCV9402-XJ	Replacement fleece bag for DCV586



54V XR FLEXVOLT CUT OFF SAW DCS690

The DCS690 delivers unrivalled cordless performance with a 54V brushless motor without the hassle of pull cord start up, petrol fumes or engine maintenance. The 230 mm blade offers an 83 mm depth of cut with an adjustable dual feed water system to manage dust. Sealed battery housing prevents dust and water ingress and a heavy load indicator helps the user cut with the optimized force. Can also be used with abrasive cutting discs for metal in 230 mm.

DT40260



DT40255



SPECIFICATIONS

Blade Diameter	230 mm
Bore Size	22.2 mm
Max. Cutting Capacity	82 mm
No Load Speed	6500 rpm
Weight	6.7 kg

ART. NO.

PRODUCT DESCRIPTION

DCS690N-XJ	54V FLEXVOLT 230 mm cut-off saw, bare
DCS690X2-QW	54V FLEXVOLT 230 mm cut-off saw 2 X 9.0 Ah

RECOMMENDED ACCESSORIES:

DT40260-QZ	230 mm diameter, Diamond blade, 22,2 mm bore size
DT40255-QZ	Extreme Metal cutting disc for steel, stainless steel, cast iron, rebar, sheet metal, aluminium and non-ferrous metals.



DEWALT MOVIE

**PERFORM
PROTECT**

**54V XR^{FLEX}
VOLT**

54V XR ANGLE GRINDER DCG418

Upgraded angle grinder with 30% more power (2.300 Watt) when using a 9.0 Ah battery compared to the previous model FLEXVOLT 54V - DCG414 (1.700 Watt). Delivers corded equivalent power with a no-load speed of 9000 rpm to deliver ultimate performance. It's part of our Perform & Protect product line with Kickback Brake and the Anti-Rotation E-CLUTCH System.

SPECIFICATIONS

Max. disc diameter	125 mm
Speed, unloaded	9000 rpm
Spindle thread	M14
Tool-free clamp nut	Yes
Weight	2.2 kg

ART. NO.

PRODUCT DESCRIPTION

DCG418N-XJ	54V XR 125 mm angle grinder solo
DCG418NT-XJ	54V XR 125 mm angle grinder TSTAK solo
DCG418T2-QW	54V XR 125 mm angle grinder TSTAK 2 x 6.0 Ah
DCG418X2-QW	54V XR 125 mm angle grinder TSTAK 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT43902	125 mm, 1,0 mm cutting disc
DT40252-QZ	125 mm, 1,3 mm extreme metal cutting disc
DT90294-QZ	125 mm, Extreme runtime diamond blade



54V XR FLEXVOLT

54V XR FLEXVOLT WALL CHASER DCG200

The world's first cordless wall chaser, powered by 54V XR FLEXVOLT batteries and a brushless motor to deliver a maximum cutting depth of 32 mm into solid concrete with an adjustable cutting width from 8 to 35 mm. Other features include Wireless Tool Control to enable automatic stop start dust extraction when used with the DCV586M, tool free cutting depth adjustment with park position and an electronic brake to protect the user from kick back.

SPECIFICATIONS

Blade Diameter	125 mm
Bore Size	22.23 mm
Max. Cutting Depth	32 mm
Max. Cutting Width	8 - 35 mm
No Load Speed	9000 rpm
Weight inc. Battery	3.7 Kg

ART. NO. PRODUCT DESCRIPTION

DCG200NT-XJ	54V XR FLEXVOLT wall chaser Tstak bare
DCG200T2-QW	54V XR FLEXVOLT wall chaser Tstak 2 X 6.0 Ah

RECOMMENDED ACCESSORIES:

DT90294-QZ	125 X 22 mm Extreme runtime diamond disc
------------	--



**PERFORM
PROTECT™**

DEWALT MOVIE

ULTIMATE SAFETY. MAXIMUM PRODUCTIVITY.

For more than 12 years, DEWALT® has been committed to developing tough, innovative solutions that not only push the boundaries on performance, but protect your team's health during operation – day in, day out. Each Perform & Protect™

product integrates best-in-class safety features.

Whether industry-leading dust management and vibration reduction technology or cutting-edge anti-rotation and torque control systems, we're

dedicated to bringing you the most advanced professional solutions that meet our stringent criteria – ensuring you can work more efficiently, for longer, with ultimate confidence and peace of mind.

DUST



ADVANCED DUST MANAGEMENT SOLUTIONS

With our Perform & Protect™ dust management solutions, the risks of dust inhalation and long-term health conditions are considerably reduced. A cleaner workspace ensures optimised product performance, working life and reliability, delivering higher levels of productivity. Our extensive line-up includes 200+ solutions and accessories, including M Class extractors with automatic filter cleaning, shrouds, hollow drill bits, plus universal extractors compatible with all brands of tools, allowing your teams to work seamlessly across the jobsite.

VIBRATION



UP TO 50% LESS VIBRATION

Prolonged exposure to vibration may cause health issues such as carpal tunnel and white finger syndrome. The Perform & Protect™ vibration certification logo indicates that vibration levels have considerably reduced, therefore increasing time and comfort of use, without compromising performance. Our SDS Plus and SDS Max hammers incorporate advanced technologies such as Active Vibration Control, which lower vibration by up to 50% compared to standard models – enabling users to work for longer, with greatly enhanced safety.

CONTROL



COMPLETE TORQUE CONTROL

High-speed, high-performance tools may jam when drilling or cutting, with the risk of injury and damage to the tool. With our Perform & Protect™ control features, you can be confident that advanced torque control technology has been integrated as standard into your tools – keeping you fully in charge at all times. Our anti-rotation E-Clutch® system detects rotational motion, minimising sudden torque reaction, while the electronic Kickback Brake built into our grinders shuts off the tool when a pinch, stall or bind-up occurs.

DEWALT®**PERFORM
PROTECT™****3 YEARS
TOTAL
SERVICE**

TOTAL SERVICE – Buy a 3 year complete service package for selected Perform& Protect products. During the 3 year period the TOTAL SERVICE will offer a complete peace of mind with no risk for unexpected cost. The following 54V products with P&P can be issued a Total Service agreement; DCD470N-XJ, DCV586MN-XJ, DCH481N-XJ, DCH614N-XJ, DCH735N-XJ, DCH775N-XJ, DCH323NT-XJ, DCH333NT-XJ, DCH334X2-QW, DCH335X2-QW, DCH417NT-XJ.

It enables you to benefit from more than just a standard warranty but rather extends your DEWALT new tool warranty to suit both your needs and the particular specifications of your tool – Find the FLEXVOLT products and the total service fee on the service list on the local country DEWALT webpages in nordic.

30

**DAYS NO RISK
SATISFACTION
GUARANTEE**

**XR FLEX
VOLT®**

30 days no risk satisfaction guarantee – For comfort you can return your FLEXVOLT product within 30 days with a receipt for a full refund.

If you are not completely satisfied with your FLEXVOLT product*, return your tool to the selling dealer within 30 days and you will receive a refund of your purchase price for the product.

* valid on FLEXVOLT powertools only, not valid on single FLEXVOLT batteries or battery packages.

54V XR FLEXVOLT
**PERFORM
PROTECT**

54V XR FLEXVOLT SDS PLUS HAMMER DRILL DCH323

Category-leading high speed drilling. Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal. Electronic clutch for consistently-high torque and improved durability. Perform & Protect certified with Best-in-class vibration at 8.5m/s^2 , minimising user fatigue. Bright white LED with delay feature improves visibility. Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4 mm to 28 mm.

SPECIFICATIONS

Impact Energy	2,8 J
Vibration	8,5 m/s ²
Max. Drilling Capacity	28 mm
No Load Speed (rpm):	0-980
Weight	3,6 kg

ART. NO.

PRODUCT DESCRIPTION

DCH323NT-XJ	54V XR FV SDS-Plus hammer, P&P, 2,8 J, TSTAK bare
DCH323T2-QW	54V XR FV SDS-Plus hammer, P&P, 2,8 J, TSTAK 2 x 6.0 Ah

RECOMMENDED ACCESSORIES:

DT60340-QZ	12 mm Ø, EXTREME SDS PLUS hollow drill bit, 320 mm length, Airlock
DT60341-QZ	14 mm Ø, EXTREME SDS PLUS hollow drill bit, 370 mm length, Airlock
DT60342-QZ	16 mm Ø, EXTREME SDS PLUS hollow drill bit, 370 mm length, Airlock
DT60343-QZ	18 mm Ø, EXTREME SDS PLUS hollow drill bit, 370 mm length, Airlock

* Hollow drill bits to be used together with extractor with airlock system.



54V XR FLEXVOLT

**PERFORM
PROTECT**

54V XR FLEXVOLT SDS PLUS HAMMER DRILL DCH333

Taking cordless drilling to the next level the 54V XR FLEXVOLT SDS-PLUS hammer drills provide true corded performance without the restrictions of the cord. Category-leading high speed drilling performance at more than 66 holes (18 mm Ø x 80 mm) per charge. Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal. Perform & Protect certified with best-in-class vibration at 8.5m/s², minimising user fatigue. Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4 mm to 30 mm. The DCH334 model is supplied with a Quick Change Chuck feature.

SPECIFICATIONS

Max. Drilling Capacity Concrete	30 mm
Impact Energy	3.5 J
No Load Speed	0 - 1000 rpm
Blows Per Minute	0 - 4320 bpm
Hand Arm Vibration	8.5 m/s ²
Weight	4.6 kg

ART. NO.

PRODUCT DESCRIPTION

DCH333NT-XJ	54V XR SDS-Plus hammer, P&P, 3,5 J, TSTAK bare
DCH333X2-QW	54V XR SDS-Plus hammer, P&P, 3,5 J, TSTAK 2x6.0 Ah
DCH334X2-QW	54V XR SDS-Plus hammer, P&P, QCC, 3,5 J, TSTAK 2x6.0 Ah

RECOMMENDED ACCESSORIES:

DT60340-QZ	12 mm Ø, EXTREME SDS PLUS hollow drill bit, 320 mm length, Airlock
DT60343-QZ	18 mm Ø, EXTREME SDS PLUS hollow drill bit, 370 mm length, Airlock

* Hollow drill bits to be used together with extractor with airlock .



54V XR FLEXVOLT

**PERFORM
PROTECT**

54V XR FLEXVOLT SDS PLUS HAMMER DRILL WITH DUSTADAPTER DCH335

Taking cordless drilling to the next level the 54V XR FLEXVOLT SDS-PLUS hammer drills provide true corded performance without the restrictions of the cord. With Brushless motors and class leading low vibration levels of 8.5 m/s². The 3 modes on the hammer includes rotation stop for light chiseling and impact stop for rotary drilling and one stop for hammer drilling. The DCH335 model is supplied with the dustadapter D25304DH. High quality washable HEPA filter capable of achieving 99.5% efficiency with dust particles as small as 0.3 microns.

SPECIFICATIONS

Max. Drilling Capacity Concrete	30 mm
Impact Energy	3.5 J
No Load Speed	0 - 1000 rpm
Blows Per Minute	0 - 4320 bpm
Hand Arm Vibration	8.5 m/s ²
Weight	4.6 kg + 1,4 kg (adapter)

ART. NO.

PRODUCT DESCRIPTION

DCH335X2-QW	54V XR FV SDS-Plus hammer, P&P, D25304DH, 3,5 J, Tstak 2 x 6.0 Ah
-------------	---

RECOMMENDED ACCESSORIES:

DT8914-QZ	SDS PLUS XLR, 6,0 mm, 210 mm length
DT8924-QZ	SDS PLUS XLR, 8,0 mm, 210 mm length
DT6984-QZ	SDS PLUS, XLR. 40 x 300 mm flat chisel



54V XR FLEXVOLT

**WIRELESS
TOOL CONTROL**

**PERFORM
PROTECT**

54V XR FLEXVOLT 32 MM SDS PLUS MULTI HAMMER DRILL DCH417

World first 4 kilo cordless SDS+ multi-drill. 3 modes available, hammer drilling, rotary only and hammer only (chiseling) for multiple applications. Taking cordless drilling to the next level the 54V XR FLEXVOLT SDS-PLUS hammer drills provide true corded performance without the restrictions of the cord. 54V battery and brushless motor deliver unrivalled performance of 4.5J and ability to drill up to 32 mm (80 mm core). Only 6.3m/s² (drilling) for increased usage time and user safety. Automatic tool and extractor connection for convenience/ease of use alongside dust removal systems (WIRELESS TOOL CONTROL).

SPECIFICATIONS

Max. drilling Capacity Concrete	32 mm
Impact Energy	4.5 J
No Load Speed	0 - 720 rpm
Blows Per Minute	0 - 4200 bpm
Hand Arm Vibration	6.3 m/s ²
Weight	4.8 kg

ART. NO.

PRODUCT DESCRIPTION

DCH417NT-XJ	54V XR FV SDS-PLUS hammer, P&P, 4,5 J, TSTAK bare*
DCH417X2-QW	54V XR FV SDS-PLUS hammer, P&P, acc. kit, 4,5 J, 2 x 9,0 Ah**

* Bare unit supplied in deep TSTAK box with keyless quick change chuck

** DCB118 charger, 2 x DCB547 XR FLEXVOLT 9.0/3.0 Ah batteries and TSTAK in box with 17 piece accessory bundle, and keyless quick change chuck



54V XR FLEXVOLT

40 MM SDS MAX HAMMER DRILL DCH481

Provides true corded performance without the cord. Anti-rotation system detects a loss of tool control, and reacts by instantly cutting the power. Rotation stop mode for chiselling and impact stop mode for rotary only drilling with dry diamond cores. Perform & Protect certified with low vibration at 9.4m/s^2 , minimising user fatigue. Ideal for drilling anchors and fixing holes into concrete, brick and masonry up to 40 mm in diameter.

SPECIFICATIONS

Max. Drilling Capacity Concrete	40 mm
Impact Energy	6.1 J
No Load Speed	0 - 540 rpm
Blows Per Minute	0 - 3150 bpm
Weight	5.4 kg

ART. NO.

PRODUCT DESCRIPTION

DCH481N-XJ	54V XR FV SDS-MAX Hammer, P&P, 40 mm, bare
DCH481X2-QW	54V XR FV SDS-MAX Hammer, P&P, 40 mm, 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT60230-QZ	16 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock
DT60232-QZ	20 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock
DT60235-QZ	32 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock

* Hollow drill bits to be used together with extractor with airlock system.

DEWALT MOVIE

54V XR^{FLEX}VOLT

WIRELESS
TOOL CONTROL

PERFORM
PROTECT

54V XR^{FLEX}VOLT 45 MM SDS-MAX HAMMER DCH614

The first DEWALT SDS MAX hammer drill to feature Wireless Tool Control built-in. The DEWALT 54V brushless motor and high capacity 54V battery delivers 10.5 Joules of impact energy which offers a maximum drilling capacity of 45 mm into solid concrete. Despite its high performance the DCH614 features class leading vibration of 8.4 m/s² thanks to Perform & Protect features including an Active Vibration Control handle and an anti-rotation system which detects a loss of tool control and reacts instantly by cutting power.

SPECIFICATIONS

Max. Drilling Capacity Concrete	45 mm
Impact Energy	10,5 J
No Load Speed	190-380rpm
Blows Per Minute	1450-2900 bpm
Weight	6,8 kg

ART. NO. PRODUCT DESCRIPTION

DCH614N-XJ	54V XR FV SDS-MAX Hammer, P&P, WTC, 45 mm, case bare
DCH614X2-QW	54V XR FV SDS-MAX Hammer, P&P, WTC, 45 mm, case 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT60230-QZ	16 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock
DT60232-QZ	20 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock
DT60235-QZ	32 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock

* Hollow drill bits to be used together with extractor with airlock system.


54V XR^{FLEX}VOLT
**WIRELESS
TOOL CONTROL**
**PERFORM
PROTECT**

54V XR FLEXVOLT 48 MM SDS MAX HAMMER DRILL DCH735

The DEWALT 54V brushless motor and high capacity battery delivers 13.3 Joules of impact energy which offers a maximum drilling capacity of 48 mm in solid concrete. The DCH735 features class leading vibration of 9.0 m/s² thanks to Perform & Protect features including an Active Vibration Control handle and an anti-rotation system which detects a loss of tool control and reacts instantly by cutting power.

SPECIFICATIONS

Max. Drilling Capacity Concrete	48 mm
Impact Energy	13.3 J
No Load Speed	177 - 355 rpm
Blows per Minute	1350 - 2705 rpm
Hand Arm Vibration	9.0 m/s ²
Weight	8.5 kg

ART. NO.

PRODUCT DESCRIPTION

DCH735N-XJ	54V XR FV SDS-MAX Hammer, P&P, WTC, 48 mm, case bare
DCH735X2-QW	54V XR FV SDS-MAX Hammer, P&P, WTC, 48 mm, case 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT60230-QZ	16 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock
DT60234-QZ	28 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock

* Hollow drill bits to be used together with extractor with airlock system.



54V XR FLEXVOLT

**WIRELESS
TOOL CONTROL**

**PERFORM
PROTECT**

54V XR FLEXVOLT 52 MM SDS MAX HAMMER DRILL DCH775

The DEWALT 54V brushless motor 19.4 Joules of impact energy which offers a maximum drilling capacity of 52 mm in solid concrete. Despite its high performance the DCH775 features class leading vibration of 10.1 m/s² thanks to Perform & Protect features including an Active Vibration Control handle and an anti-rotation system which detects a loss of tool control and reacts instantly by cutting power.

SPECIFICATIONS

Max. Drilling Capacity Concrete	52 mm
Impact Energy	19,4 J
No Load Speed	145 - 290 rpm
Blows per Minute	1105 - 2210 rpm
Hand Arm Vibration	10,1 m/s ²
Weight	9.5 kg

ART. NO.

PRODUCT DESCRIPTION

DCH775N-XJ	54V XR FV SDS-MAX Hammer, P&P, WTC, 52 mm, case bare
DCH775X2-QW	54V XR FV SDS-MAX Hammer, P&P, WTC, 52 mm, case 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT60232-QZ	20 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock
DT60235-QZ	32 mm Ø, EXTREME SDS MAX hollow drill bit, 600 mm length, Airlock

* Hollow drill bits to be used together with extractor with airlock system.

54V XR FLEXVOLT

54V XR FLEXVOLT COMPRESSOR DCC1054

The DCC1054 XR FLEXVOLT Pneumatic Compressor makes pneumatic nailing completely cordless. The 10 litre compressor is battery powered and lightweight allowing you to cut the cord and take pneumatic nailing anywhere on the jobsite. Featuring our OneTurn regulator, the DCC1054 allows you to adjust the compressor's regulated pressure quickly and easily.

SPECIFICATIONS

Tank Capacity	10 L
Max. Tank Pressure	9.3 bar / 135 psi
Weight	11 kg
Oil Free Brushless Motor	Yes

ART. NO. PRODUCT DESCRIPTION

DCC1054N-XJ	54V XR FLEXVOLT Compressor, 10 ltr bare
DCC1054T2-QW	54V XR FLEXVOLT Compressor, 10 ltr 2 x 6.0 Ah



54V XR FLEXVOLT

54V XR FLEXVOLT PADDLE MIXER DCD240

The world's first 54V cordless paddle mixer with the power of corded. Ideal for on site mixing applications such as plaster, render and epoxy. 54V brushless motor for extended runtime, dual handle design and 5 speed settings for increased control in various materials.

SPECIFICATIONS

No Load Speed	0 - 725 rpm
Max. Paddle Size	180 mm
Spindle Thread	M14
Weight	5.5 kg

ART. NO.

PRODUCT DESCRIPTION

DCD240N-XJ	54V XR FV DUAL Handle paddle mixer bare
DCD240X2-QW	54V XR FV DUAL Handle paddle mixer 2 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT4952-QZ	120 x 600 mm paddle mixer, M14
-----------	--------------------------------

EVERY SINGLE ONE IS
RIGOROUSLY
TESTED
TO WITHSTAND THE HARSHTEST
CONDITIONS

**54V XR^{FLEX}
VOLT[®]**




54V XR FLEXVOLT
NYHED

54V XR FLEXVOLT AXIAL BLOWER DCMBA572

Designed for the fast and effective removal of construction debris, workshop waste, leaves, twigs, moss and other stubborn garden matter, this versatile and powerful cordless blower will be welcomed by an array of professional users including construction teams, carpenters, metal and woodworkers, gardeners, landscapers, park clean-up workers and clearance specialists. Axial blower model are suitable for blowing on wide areas.

SPECIFICATIONS

Voltage	54 V
Air volume	650 cfm (18,4 m ³ /min)
Blow speed	200 km/h
Sound power level	97 dBA
Weight	3.1 kg

ART. NO.

PRODUCT DESCRIPTION

DCMBA572N-XJ	54V XR FLEXVOLT Axial blower bare
DCMBA572X1-QW	54V XR FLEXVOLT Axial blower 1 x 9.0 Ah



54V XR FLEXVOLT

54V XR FLEXVOLT RADIAL BLOWER DCM572

Powered by the 54V XR FLEXVOLT battery, the DCM572 blower from DEWALT clears more debris quickly with up to 423CFM and 207 km/h. High efficiency brushless motor. Radial blower model are suitable for blowing on narrow areas.

SPECIFICATIONS

Voltage	54V
Air volume	423 cfm (12 m ³ /min)
Blow speed	207 km/h
Sound power level	97 dBA
Weight	3.2 kg

ART. NO.

PRODUCT DESCRIPTION

DCM572N-XJ	54V XR FLEXVOLT radial blower bare
DCM572X1-QW	54V XR FLEXVOLT radial blower 1 x 9.0 Ah


54V XR FLEXVOLT

54V XR FLEXVOLT GRASS TRIMMER DCM5713

Offering all the power of a petrol driven tool without the inconvenience of having to carry / mix fuel. The DCM5713N string trimmer also benefits from a 38 cm swathe allowing it to be used for simple grass cutting.

SPECIFICATIONS

Cutting Width	38 cm
Load Speed	0 - 5600 rpm
Line Diameter	2 mm
Line Length	7.5 m
Weight	6.6 kg

ART. NO.

PRODUCT DESCRIPTION

DCM5713N-XJ	54V XR FLEXVOLT Grass Trimmer bare
-------------	------------------------------------

RECOMMENDED ACCESSORIES:

DT20650-QZ	Grass Trimmer Line 2 mm x 15.2 m
DT20651-QZ	Grass Trimmer Line 2 mm x 68.6 m
DT20652-QZ	Grass Trimmer Line 2.5 mm x 68.6 m
DT20656-QZ	Grass Trimmer Cap, Spool & Line



54V XR^{FLEX}VOLT

54V FLEXVOLT STRING TRIMMER / BRUSHCUTTER DCM571

The 54V XR FLEXVOLT grass trimmer enables fast job completion with its 38 cm cutting swath. The high efficiency brushless motor enables increased runtime, durability and efficiency. 2 speed setting and variable speed trigger provide ultimate control. 25 cm Tri-blade included for brush cutting applications.

SPECIFICATIONS

Voltage	54 V
Cutting width	38 cm
Line cutting speed	0-5100 / 0-5600 rpm
Weight	4,6 kg


ART. NO.

PRODUCT DESCRIPTION

DCM571N-XJ	54V XR FLEXVOLT Brushcutter bare
DCM571X1-QW	54V XR FLEXVOLT Brushcutter 1 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT20650-QZ	Grass Trimmer Line 2mm x 15.2 m
DT20651-QZ	Grass Trimmer Line 2mm x 68.6 m
DT20652-QZ	Grass Trimmer Line 2.5mm x 68.6 m
DT20656-QZ	Grass Trimmer Cap, Spool & Line
DT20653-QZ	25 cm Brushcutter Tri-Blade
DT20654-QZ	25.5 cm Brushcutter Striaight Blade
DT20655-QZ	23 cm Brushcutter 4T Blade
DT20657-QZ	Brushcutter Adapter Set



54V XR FLEXVOLT

54V XR FLEXVOLT CHAINSAW DCM575

The high power 54V XR FLEXVOLT battery, combined with the brushless XR FLEXVOLT motor and the 40 cm Bar/Chain allows the DCM575 chainsaw to cut through thick tree trunks easily and quickly. With the 54V XR FLEXVOLT motor, the DCM575 chainsaw truly delivers unrivalled performance for a cordless chainsaw, without the hassle of pull cord start up, petrol fumes or engine maintenance.

SPECIFICATIONS

Tool Free Chain Tensioning	Yes
Sound Power Uncertainty	100.5 dB(A)
Oil capacity	110-120 ml
Cut Speed	15 m/s
Weight	5,68 kg

ART. NO. PRODUCT DESCRIPTION

DCM575N-XJ	54V XR FLEXVOLT chainsaw bare
DCM575X1-QW	54V XR FLEXVOLT chainsaw 1 x 9.0 Ah

RECOMMENDED ACCESSORIES:

DT20660-QZ	Chainsaw 40 cm Bar & Chain (DT20663)
DT20663-QZ	Replacement 40 cm Chain
DT20661-QZ	Chainsaw 46 cm Bar & Chain (DT20664)
DT20664-QZ	Replacement 46 cm Chain
DT20662-QZ	Chainsaw oil for all chainsaws

DCMAS5713X1-QW
54V XR FLEXVOLT Splitbom
motor unit incl trimmer
attachment, DCB547
battery, shoulder
strap, and
softbag

DCMAS5713N-XJ*
54V XR FLEXVOLT
Splitbom motor unit
to attachments incl.
shoulder strap.



XR FLEXVOLT

POWER OF CORDED | FREEDOM OF CORDLESS

ATTACHMENTS THAT CAN BE BOUGHT FOR THE SPLITBOM MOTOR UNIT

54V XR FLEXVOLT

54V XR FLEXVOLT
string trimmer
attachment bare
DCMASST1N-XJ



54V XR FLEXVOLT
brushcutter
attachment bare
DCMASBC1N-XJ



54V XR FLEXVOLT
hedgetrimmer
attachment bare
DCMASPS5N-XJ



54V XR FLEXVOLT
pole saw
attachment bare
DCMASPH6N-XJ



54V XR FLEXVOLT MOTOR UNIT AND ATTACHMENT UNITS

When multiple tools are required split boom systems offer a more economic solution. The attachment range covers the most common outdoor applications: String trimmer, brush cutter, pole hedge, pole saw. Well balanced design and split shaft for compact storage and easy transportation.

SPECIFICATIONS

Power	54 volt
Variable speed	Yes
Brushless motor	Yes
Weight (motorunit)	6,4 kg

ART. NO.

PRODUCT DESCRIPTION

DCMAS5713N-XJ*	54V XR FLEXVOLT motor unit bare
DCMASBC1N-XJ	54V XR FLEXVOLT brushcutter attachment bare
DCMASST1N-XJ	54V XR FLEXVOLT string trimmer attachment bare
DCMASPH6N-XJ	54V XR FLEXVOLT Pole hedge trimmer attachment bare
DCMASPS5N-XJ***	54V XR FLEXVOLT Pole saw attachment bare
DCMAS5713X1-QW**/**	54V XR FLEXVOLT Splitbom string trimmer kit 1 X 9.0 Ah

* Shoulderstrap incl. ** Softbag incl. *** Extension pole incl.

A BATTERY BUILT FOR LONGER DAYS.



54V XR FLEXVOLT

SHIP AS NON CLASS 9 WITH TRANSPORT CAP ON THE BATTERY, THEN IT PROVIDES 3 X 90 WATT, INSTEAD OF 270 WATT WITHOUT THE TRANSPORT CAP

NEW

18/54V FLEXVOLT 15 AH BATTERY

A battery built for longer days. The DCB549 XR FLEXVOLT 15 Ah battery provides the highest capacity of any battery on the DEWALT cordless system. It changes Vage when going from 54V XR FLEXVOLT to 18V XR tools and is compatible with almost all of your 18V XR tools and chargers. In XR FLEXVOLT tools it will deliver class leading 54V cordless power and in 18V XR tools it will provide unparalleled runtime. Suited for use in tools where user is not supporting full weight of tool (e.g. breakers, mitre saws, table saws)

SPECIFICATIONS	
Power	18 V and 54 V (FLEXVOLT)
Number of cells	30 x 2.5 Ah cells in vertical position.
Type of cells	18 650 cells
Output	270 Wh
Ship as non class 9	Yes, when transport cap is on.
Weight	2,0 kg
ART.NR. PRODUCT DESCRIPTION	
DCB549-XJ	18/54V XR FLEXVOLT 15.0/4.0 Ah battery

18V/54V

FLEXVOLT BATTERIES

FLEXVOLT BATTERY DCB546-XJ

PRODUCT DESCRIPTION

When used in 18V products = 6.0 Ah

When used in 54V products = 2.0 Ah

108 Wh = without red transport cap

3 x 36 Wh = with red transport cap on



FLEXVOLT BATTERY DCB547-XJ

PRODUCT DESCRIPTION

When used in 18V products = 9.0 Ah

When used in 54V products = 3.0 Ah

162 Wh = without red transport cap

3 x 54 Wh = with red transport cap on



**SHIP AS NON-CLASS 9 IF RED/GREY TRANSPORT CAP IS ON
THE BATTERY DURING TRANSPORT. VALID FOR ALL 4 BATTERIES**

FLEXVOLT BATTERY DCB548-XJ

PRODUCT DESCRIPTION

When used in 18V products = 12.0 Ah

When used in 54V products = 4.0 Ah

216 Wh = without red transport cap

3 x 72 Wh = with red transport cap on



FLEXVOLT BATTERY DCB549


PRODUCT DESCRIPTION

When used in 18V products = 15.0 Ah

When used in 54V products = 5.0 Ah

270 Wh = without red transport cap

3 x 90 Wh = with grey transport cap on

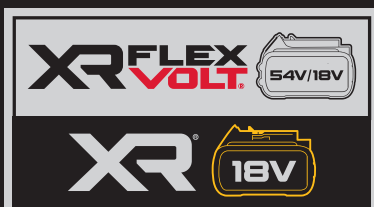

XR FLEXVOLT

15 AH

SOMETIMES BIGGER IS BETTER



54V XR FLEXVOLT

A BATTERY
BUILT
FOR LONGER DAYS.

NEW

BATTERIES AND CHARGERS FOR THE XR FLEXVOLT ASSORTMENT:

ART. NO.	PRODUCT DESCRIPTION
DCB546-XJ	18/54V XR FLEXVOLT 6.0/2.0 Ah battery
DCB547-XJ	18/54V XR FLEXVOLT 9.0/3.0 Ah battery
DCB548-XJ	18/54V XR FLEXVOLT 12.0/4.0 Ah battery
DCB549-XJ	18/54V XR FLEXVOLT 15.0/5.0 Ah battery
DCB546T2-XJ	18/54V XR FLEXVOLT battery starter kit 2 x 6.0 Ah
DCB547X2-XJ	18/54V XR FLEXVOLT battery starter kit 2 x 9.0 Ah
DCB548Y2-XJ	18/54V XR FLEXVOLT battery starter kit 2 x 12.0 Ah
DCB118T2-QW	54V FLEXVOLT starter kit 2 x 6.0 Ah, 1 x DCB118
DCB118X2-QW	54V FLEXVOLT starter kit 2 x 9.0 Ah, 1 x DCB118
DCB118Y2-QW	54V FLEXVOLT starter kit 2 x 12.0 Ah, 1 x DCB118
DCB118Y2T-QW	54V FLEXVOLT starter kit 2 x 12.0 Ah, 1 x DCB118, TSTAK II
DCB132T2-QW	54V FLEXVOLT starter kit 2 x 6.0 Ah, 1 x DCB132
DCB132X2-QW	54V FLEXVOLT starter kit 2 x 9.0 Ah, 1 x DCB132

XR FLEXVOLT CHARGER DCB118

The DCB118 charges 54V XR FLEXVOLT and 18V XR batteries and is fan cooled for optimum performance and operates between 4°C and 40°C. It can be wall mounted to keep your jobsite or van tidy. Is charging 8A at the port.



XR FLEXVOLT DUAL CHARGER DCB132

The DCB132 simultaneously charges two 54V XR FLEXVOLT or 18V XR batteries at a 4A output on each port.



XR FLEXVOLT CHARGER DCB104

Charges up to four 12V XR, 18V XR and XR FLEXVOLT batteries at the same time. This fast charger quickly charges a 5.0 Ah 18V XR battery in 50 minutes, and a 9.0 Ah XR FLEXVOLT battery in 75 minutes. Is charging 8A at the ports.



XR FLEXVOLT CHARGER DCB117

The DCB117 charges 54V XR FLEXVOLT and 18V XR batteries and is fan cooled for optimum performance and operates between 4°C and 40°C. It can be wall mounted to keep your jobsite or van tidy. Is charging 12A at the port.



ART. NO.	PRODUCT DESCRIPTION
DCB118-QW	18V XR fast charger 8.0 Ah
DCB132-QW	18V XR Dual port charger 4.0 Ah
DCB104-QW	18V XR 4 port fast charger 8.0 Ah
DCB117-QW	18V XR fast charger 12.0 Ah

ABOUT DEWALT

With more than 90 years' experience in designing and manufacturing world-class solutions for the professional construction industry, DeWALT represents performance, innovation and reliability. Tools that carry the DeWALT brand are Guaranteed Tough: engineered to exceed the expectations of building contractors and professional tradesmen, even when tested in the most extreme construction environments. The DeWALT reputation for quality has been earned from the company's commitment to providing best-in-class

products that meet the highest levels of durability and end-user protection. DeWALT supplies complete application solutions for the modern construction environment, which include corded and cordless power tools, saw blades and power tool accessories, dust extraction attachments, anchors and fastenings, jobsite storage, lasers and instruments, generators, compressors and more. DeWALT also has one of the most extensive service and repair networks in the world.

For more information, visit www.DeWALT.com



www.DeWALT.com

The yellow and black colour scheme is used on DeWALT Power Tools and Accessories as a trademark. DeWALT cannot be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification.

Be the first to see product news and special offers from DeWALT. Register at MyDeWALT

